



BATH + LIGHT



BRICK LIGHT 5W

Alfie LED Brick Light

Outdoor Luminaire

Product Code:

LBRK01S105XW

5W - 220lm - 3000K - CRI>80 Ra - Beam Angle - Asymmetric



Technical Specifications

Operating Temperature	-10°C to 50°C
Rated Input Voltage & Frequency	220-240 V AC
Rated Input Wattage	5W ± 10%
Rated Input Current	0.002 Amp (Nominal)
Power Factor	>0.90
ATHD	<20%
Rated Luminous Flux	220 lm (tolerance as per BIS)
Rated Luminaire Efficacy	44 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>80 Ra
Beam Angle	Asymmetric
Driver Efficiency	≥85%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Aluminium Die Cast with Powder Coating
Lens / Reflector	Frosted PC Diffuser
Mounting	Recessed


Protections

Over Voltage Protection	300 VAC upto 20 Min.
Surge Protection	±2.0KV
Protection Class	Class I
Ingress Protection (IP Rating)	IP65
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

Product Dimensions (L x W x H), Cutout (L x W)

235 X 73 X 67 mm (Tol.±5 mm), 225 X 65 mm

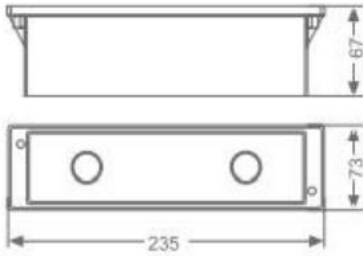

Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other outdoor applications.