



BATH + LIGHT

STRIP LIGHT 75W


OUTDOOR STRIP LIGHT

Outdoor Luminaire

Product Code:

LSTP04X015XC / LSTP04X015XN / LSTP04X015XW

75W - 5250lm - 6500K - CRI>80 Ra - Beam Angle - 120°



Technical Specifications

Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	220-240 VAC, 50Hz
Rated Input Wattage	75W \pm 10%
Rated Input Current	4.0 Amp (Nominal)
Rated Input Voltage	24VDC \pm 0.5V
Rated Luminous Flux	5250 lm / 4875 lm / 4500 lm (tolerance as per BIS)
Rated Luminaire Efficacy	70 lm/W / 65 lm/W / 60 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	6500 K / 4000 K / 3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>80 Ra
Beam Angle	120° (within the permissible limits)
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Thick Double Layer Copper Flexible PCB
Lens / Reflector	Silicon Sleeve Transparent
Mounting	Surface (With 3M Double Sided adhesive Tape)


Protections

Ingress Protection (IP Rating)	IP65
--------------------------------	------

All technical data is subject to industry-standard tolerances.

Product Dimensions (W x H), Length

10 X 4.5mm, 5 Meter

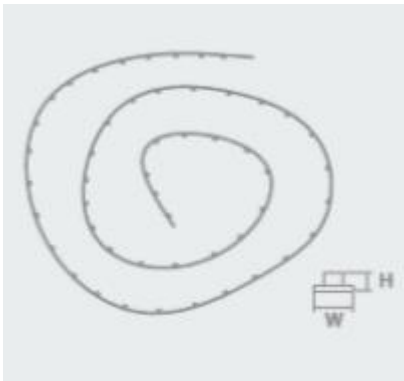

Applications

Applications Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.