

### ERIS 15W


ERIS SURFACE ROUND

Indoor Luminaire

Product Code:

LERSBRGR15SC / LERSBRGR15SN / LERSBRGR15SW

15W - 1200lm - 6500K - CRI>80 Ra - Beam Angle - 24°



### Technical Specifications


Operating Temperature	-10°C to 40°C
Rated Input Voltage & Frequency	220 ~ 240 VAC, 50Hz
Rated Input Wattage	15W ± 10%
Rated Input Current	0.068 Amp (Nominal)
Power Factor	≥0.90
THD	<10%
Rated Luminous Flux	1200 lm / 1125 lm / 1050 lm (tolerance as per BIS)
Rated Luminaire Efficacy	80 lm/W / 75 lm/W / 70 lm/W (tolerance as per BIS)
Correlated Color Temperature (CCT)	6500 K / 4000 K / 3000 K (tolerance as per ANSI)
Color Rendering Index (CRI)	>80 Ra
Beam Angle	24° (within the permissible limits)
Driver Efficiency	≥85%
LED Life Span	>50000 Hrs (Ta=25°C @L70)
Housing	Die Cast Aluminium with Black Powder Coating
Lens / Reflector	PC Lens & Reflector
Mounting	Surface

### Protections

Over Voltage Protection	Withstand upto 440V/AC for 4 Hrs.
Surge Protection	±4.0KV
Protection Class	Class II
Ingress Protection (IP Rating)	IP20
Impact Protection (IK Rating)	IK02
Short Circuit Protection	Provided
Open Circuit Protection (No Load)	Provided
Reverse Polarity Protection	Provided

All technical data is subject to industry-standard tolerances.

## Light Distribution

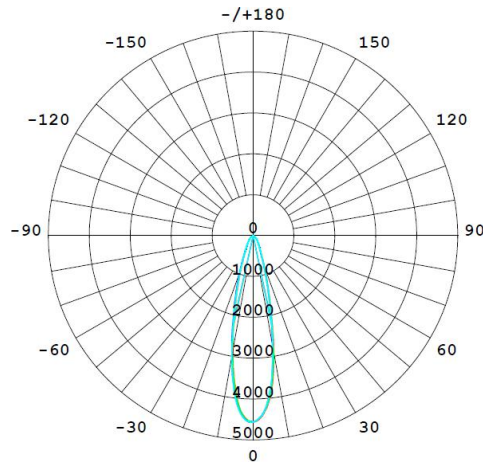


## UGR Table

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	17.9	18.8	18.2	18.9	19.1	17.8	18.6	18.0	18.8	19.0
3H	17.8	18.5	18.0	18.7	18.9	17.7	18.4	17.9	18.6	18.8
4H	17.7	18.4	18.0	18.6	18.8	17.6	18.3	17.9	18.5	18.7
6H	17.6	18.3	17.9	18.5	18.8	17.5	18.2	17.8	18.4	18.7
8H	17.6	18.2	17.9	18.5	18.7	17.5	18.1	17.8	18.4	18.6
12H	17.5	18.1	17.8	18.4	18.7	17.4	18.0	17.7	18.3	18.6
4H 2H	17.7	18.5	18.0	18.7	18.9	17.6	18.4	17.9	18.6	18.8
3H	17.6	18.2	17.9	18.5	18.7	17.5	18.1	17.8	18.4	18.6
4H	17.5	18.0	17.8	18.3	18.6	17.4	17.9	17.7	18.2	18.5
6H	17.4	17.9	17.7	18.2	18.5	17.3	17.8	17.6	18.1	18.4
8H	17.3	17.8	17.7	18.1	18.5	17.2	17.7	17.6	18.0	18.4
12H	17.3	17.7	17.7	18.1	18.5	17.2	17.6	17.6	18.0	18.3
8H 4H	17.3	17.8	17.7	18.1	18.5	17.2	17.7	17.6	18.0	18.4
6H	17.2	17.6	17.6	18.0	18.4	17.1	17.5	17.5	17.9	18.3
8H	17.2	17.5	17.6	17.9	18.4	17.1	17.4	17.5	17.8	18.2
12H	17.1	17.4	17.6	17.8	18.3	17.0	17.3	17.5	17.7	18.2
12H 4H	17.3	17.7	17.7	18.1	18.5	17.2	17.6	17.6	18.0	18.3
6H	17.2	17.5	17.6	17.9	18.4	17.1	17.4	17.5	17.8	18.2
8H	17.1	17.4	17.6	17.8	18.3	17.0	17.3	17.5	17.7	18.2
Variations with the observer position at spacings (CIE Pub.117) :										
S = 1.0H	+ 2.3 / - 7.3					+ 2.3 / - 7.5				
1.5H	+ 1.5 / - 5.5					+ 1.5 / - 5.7				
2.0H	+ 4.7 / -13.1					+ 4.7 / -13.5				

## Product Dimensions (Dia x H)

Ø95 X 95 mm (Tol. ± 5 mm)

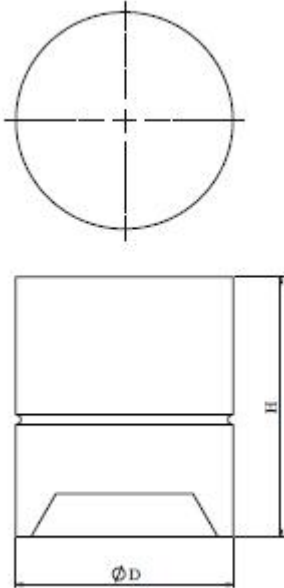

## Applications

Residences, Offices, Small Retail Shops, Hotels, Coffee Shops, Restaurants, Hospitals, area lighting and for other indoor applications.